HYDRAULIC PUMP UNITS & JACKS

HOW IT WORKS


Both our submersible and dry pump units are rugged, reliable and built with the features and value you demand.

Jacks include pistons and mating cylinders that are precision machined for quick installation and years of trouble-free service.

QUALITY JACKS IN ABOUT 3 WEEKS

Submersible pump units have flow rates from 8.3 to 255 GPM. All components are enclosed in the tank.

Dry pump units offer standard 170 or 215 gallon capacity, with custom sizes available. Choose from 80 or 120 starts/hour.

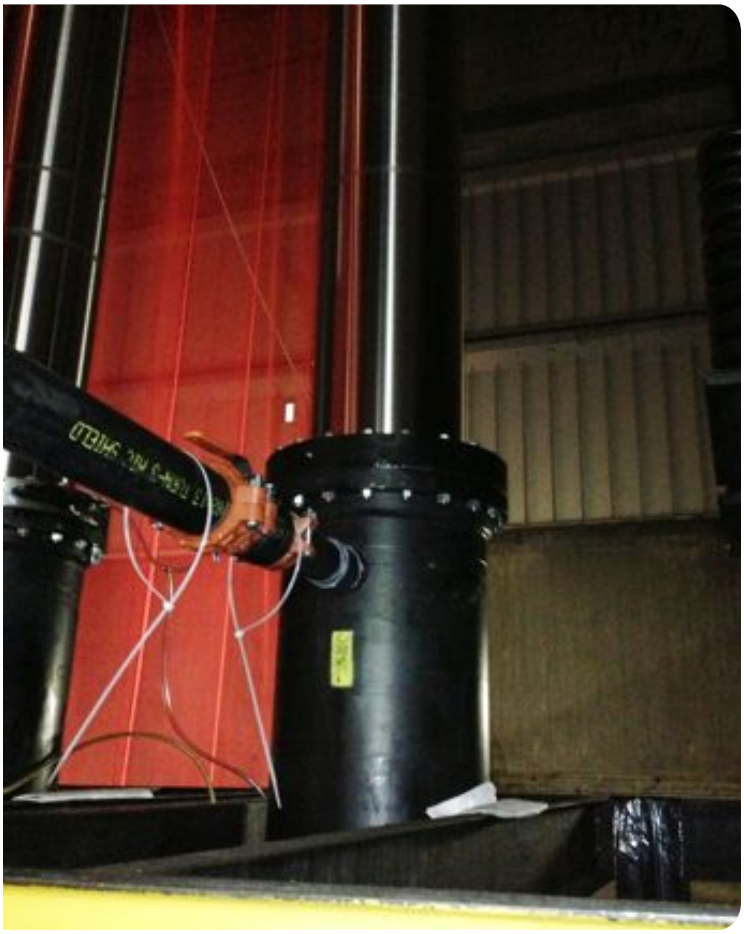

ADVANTAGES

- ASME A17.1 Compliant
- Vic or Threaded Connections
- Welded Steep Pump Units
- Easy Access Pump Design
- Piston sizes 4” to 16”
- One Piece Pistons to 54’
- Sealed PVC Systems

PRICE PERFORMANCE LEADERS

Quality Bread & Butter Hydraulic Components

LIFT SOLUTIONS

tel: **360.862.8328**
fax: **425.334.2318**

email: **info@liftsolutions.net**
web: **www.liftsolutions.net**

©2013 Lift Solutions, Inc. Data is subject to change. Consult manufacturer’s current product specifications.

1.888.277.8310